



## Data centres

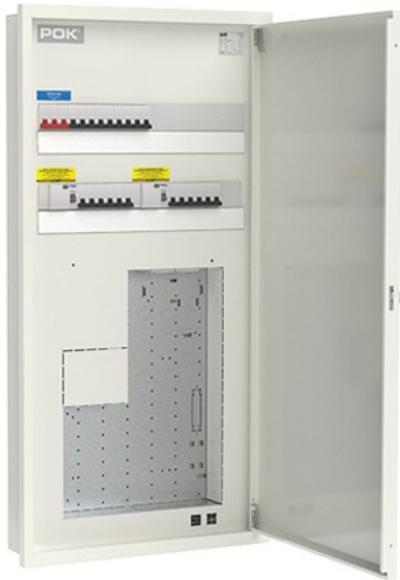

# DATA CENTRES

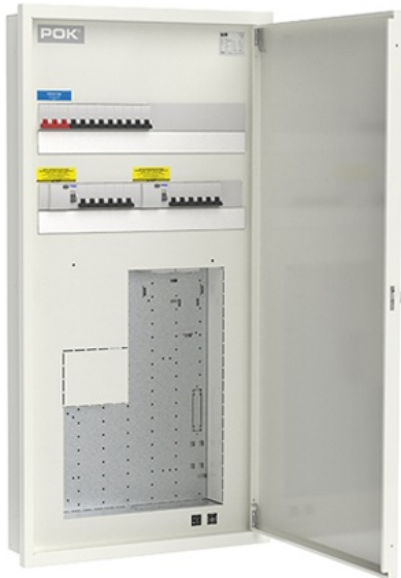

The ITK data group centres are suited to renovation and new construction. The open back enables easy connectivity for cables fed through the bottom. The centre can be installed both vertically and horizontally. For horizontal installation, we recommend an optional door holder kit.

In the ITP data group centres, the IT and electricity distribution spaces are located on top of each other. The side of the centre has a cable chute by the IT space for the wiring of the electricity distribution section. This makes it easy to connect a feed cable from the bottom.

The IT space can be equipped with a wide variety of fittings, which enables several different uses. All data centres are available for both surface and flush mounting.

# DATA CENTRES

SSTL number	Name	Product description	In	Installation
3312418	Ryhmäkeskus-data pinta FE ITK840P-18J2V	In25, 2x4P VVSK, 385x850x110		
3312419	Ryhmäkeskus-data pinta FE RKS1000P-19J2V-IT	In25, 2x4P VVSK, 270x1000x102		
3312424	ITP980U/60, Data group centres	IT 0,24m2		
3312425	ITP980U/60, Data group centres	IT 0,24m2		



## Product info

The ITK data group centres are suited to renovation and new construction. The open back enables easy connectivity for cables fed through the bottom. The centre can be installed both vertically and horizontally. For horizontal installation, we recommend an optional door holder kit (only for a right-hand door). The IT space can be equipped with a wide variety of fittings, which enable several different uses. Available for both surface and flush mounting.

## Technical details

Electrical number	3312418	Main switch (A)	40
Ue (V)	230/400	Breaker 1-pole C10	9
In (A)	25	Breaker 1-pole C16	9
IP	20	Reserved (mod)	7
fn		RJ -connector	12x(15*20),10x(17*18),12x(15*19,5)
Icw	<5kA	Installation	Surface
Material	Cu-Zn	Väri	RAL9010





### Technical details

Electrical number	3312419	Main switch (A)	40
Ue (V)	230/400	Breaker 1-pole C10	9
In (A)	25	Breaker 1-pole C16	10
IP	20C	Reserved (mod)	7
fn		RJ -connector	12x(17*18) + 14x(15*19,5)
Icw	<5kA	Installation	Surface
Material	Cu-Zn	Väri	RAL9016





## Product info

In the ITP data group centres, the IT and electricity distribution spaces are located on top of each other. The side of the centre has a cable chute by the IT space for the wiring of the electricity distribution section. This makes it easy to connect a feed cable from the bottom. The IT space can be equipped with a wide variety of fittings, which enable several different uses. Available for both surface and flush mounting. The surface-mounted model contains the necessary feed-through flanges and a fixed back plate. When flush-mounted, the centre only rises 4mm above the wall surface!

## Technical details

Electrical number	3312424	Breaker 1-pole B16	-
Ue (V)	230/400	Breaker 1-pole C16	12
In (A)	25	Breaker 1-pole C20	-
IP	20C	Breaker 3-pole C16	-
fn			-
Icw	<5kA		-
Material	Ku-Si	Reserved (mod)	9
Main switch (A)	40	RJ -connector	12x(17*18) + 14x(15*19,5)
Breaker 1-pole C6	-	Installation	Uppo tai pinta
Breaker 1-pole B10	-	Väri	RAL9010
Breaker 1-pole C10	9		





## Product info

In the ITP data group centres, the IT and electricity distribution spaces are located on top of each other. The side of the centre has a cable chute by the IT space for the wiring of the electricity distribution section. This makes it easy to connect a feed cable from the bottom. The IT space can be equipped with a wide variety of fittings, which enable several different uses. Available for both surface and flush mounting. The surface-mounted model contains the necessary feed-through flanges and a fixed back plate. When flush-mounted, the centre only rises 4mm above the wall surface!

## Technical details

Electrical number	3312425	Breaker 1-pole B16	6
Ue (V)	230/400	Breaker 1-pole C16	12
In (A)	50	Breaker 1-pole C20	-
IP	20C	Breaker 3-pole C16	-
fn			-
Icw	<5kA		-
Material	Ku-Si	Reserved (mod)	21
Main switch (A)	63	RJ -connector	18x(17*18) + 22x(15*19,5)
Breaker 1-pole C6	-	Installation	Pinta / Uppo
Breaker 1-pole B10	6	Väri	RAL9010
Breaker 1-pole C10	12		

